


Typical application of a gravimetric batch blender.

- A Gravimetric Batch Blender
- B Control Unit
- C Printer
- D Host

Component A is described below.

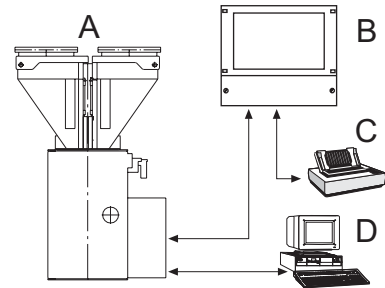

Description

Colortronic's gravimetric batch blender Ultrablend UB 75 is ideally suited for blending granulates, additives and regrinds.

High dosing accuracy and consistency improves end product quality and saves money by using less additives and reducing scrap. The Ultrablend UB 75 is specially designed for direct mounting on small injection molding machines and extruders. All products are dosed and weighed one after each other into a weigh hopper supported by a single load cell. Once all components are weighed, they are passed to the mixing chamber where they are homogenized before exiting the blender.

- Ultrablend is easy to maintain and designed for a 7 day, 24 hour operation.
- Ultrablend meets the european "CE" requirements.

Rugged, modular construction

Gravimetric batch blender for up to four components. Stainless steel material contact surfaces. The Product is weighed with a single load cell. The vertical slide gate design improves accuracy and results in a compact design. The modular construction for extension hoppers and conveying system integration guarantees high flexibility.



Technical Data

Basic Version

- Up to four dosing components
- Weigh hopper volume 1.5 Liters
- Mixer volume 4.5 Liters
- Dosing hopper volume: 6, 25 Liters
- Maximum throughput (2 components, free flowing granulate, density 0.6 kgs/l): 260 kg/hr
- Operating voltage: 115/230 VAC,50/60Hz
- Air pressure: 6 bar
- Weight (4 component): 55 kgs
- Control unit UB Touch


Optional Equipment

- Capacitive level sensor for mixer
- Manual or pneumatic slide gate under blender
- Level sensor control of slide gate below the blender
- Hopper extension modules
- Conveying systems
- Level sensors in dosing hoppers
- Machine adapters
- Special voltages

Versions

- Dosing hopper SV-S for granules and regrind
6 l, max. 120 g/s
- Dosing hopper SV-M for granules and regrind
25 l, max. 270 g/s

Dimensions

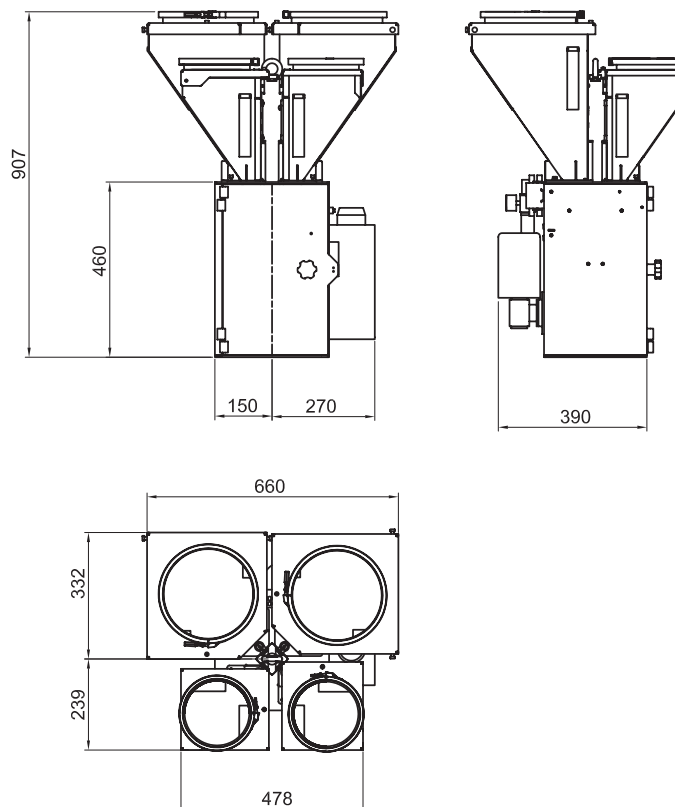

www.colortronic.com

Colortronic GmbH
Germany

☎ +49 6175 792-0
☎ +49 6175 792-1 79
✉ info@colortronic.de

Colortronic AG
Switzerland

☎ +41 62 889 25 25
☎ +41 62 889 25 26
✉ info@colortronic.ch

Colortronic N.A. Inc.
USA

☎ +1 810 720 73 00
☎ +1 810 720 25 98
✉ ctusa@colortronic.com

Colortronic Systems Pte. Ltd
Singapore

☎ +65 677 77 665
☎ +65 677 88 671
✉ ctasia@colortronic.com

Colortronic s.a.r.l.
France

☎ +33 03 88 59 18 10
☎ +33 03 88 59 18 11
✉ ctfrance@colortronic.com

Colortronic srl
Italy

☎ +39 0 131 87 29 33
☎ +39 0 131 87 29 41
✉ info@colortronic.it

Colortronic U.K. Ltd.
United Kingdom

☎ +44 12 46 260 222
☎ +44 12 46 455 420
✉ sales@colortronic.co.uk

Colortronic Kft. South East Europe
Hungary

☎ +36 263 610 51
☎ +36 263 610 51
✉ kft@colortronic.info