


Typical set up for a multiple vacuum conveying system.

- A Material clearing valve
- B Rotary valve system.
- C Two component valve
- D Hopper loader
- E Conveying control system
- F Safety filter
- G Vacuum pump
- H Granulator
- I Processing machine

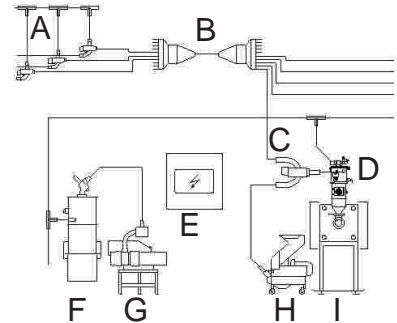

Component D is described below.

## Brief Description

### Application

The Colortronic CSK-1 allows for the conveying of free flowing pelletized plastic materials using vacuum receivers (CSK-1) which integrates into a central conveying system. When conveying very abrasive materials, a high abrasion resistant option is available.

- Colortronic hopper loaders are designed for continuous 24-hour operation
- Colortronic hopper loaders meet the European "CE" requirements.

### Rugged, modular construction

The hopper loaders work without filters and are made of stainless steel, guaranteeing minimum abrasion and corrosion.

The modular design, with the hinged lid, allows for flexibility to meet changes in process requirements. Material changes and cleanings are made quickly and easily allowing for minimal downtime of the customer's process.

The operating conditions are indicated on the hopper loader by large LED's as follows: on; demand; conveying; alarm.




**Technical Information**

**Basic Version**

- Hopper loader capacity approx. 1.25 l; 76 cu. inch.
- Made of stainless steel DIN material No. 1.4301
- Cleaning opening
- Hinged lid
- Pneumatic valve (2)
- On/off switch on the hopper loader
- Indication of operating conditions at the hopper loader:  
on, demand, conveying, alarm
- ZKW output
- Voltage 24 VDC
- Maximum material temperature  
approx: 160 °C / 320 °F

**Optional Equipment**

- Diaphragm valve (1)
- Maximum level probe
- High abrasion resistant option
- Connection modules

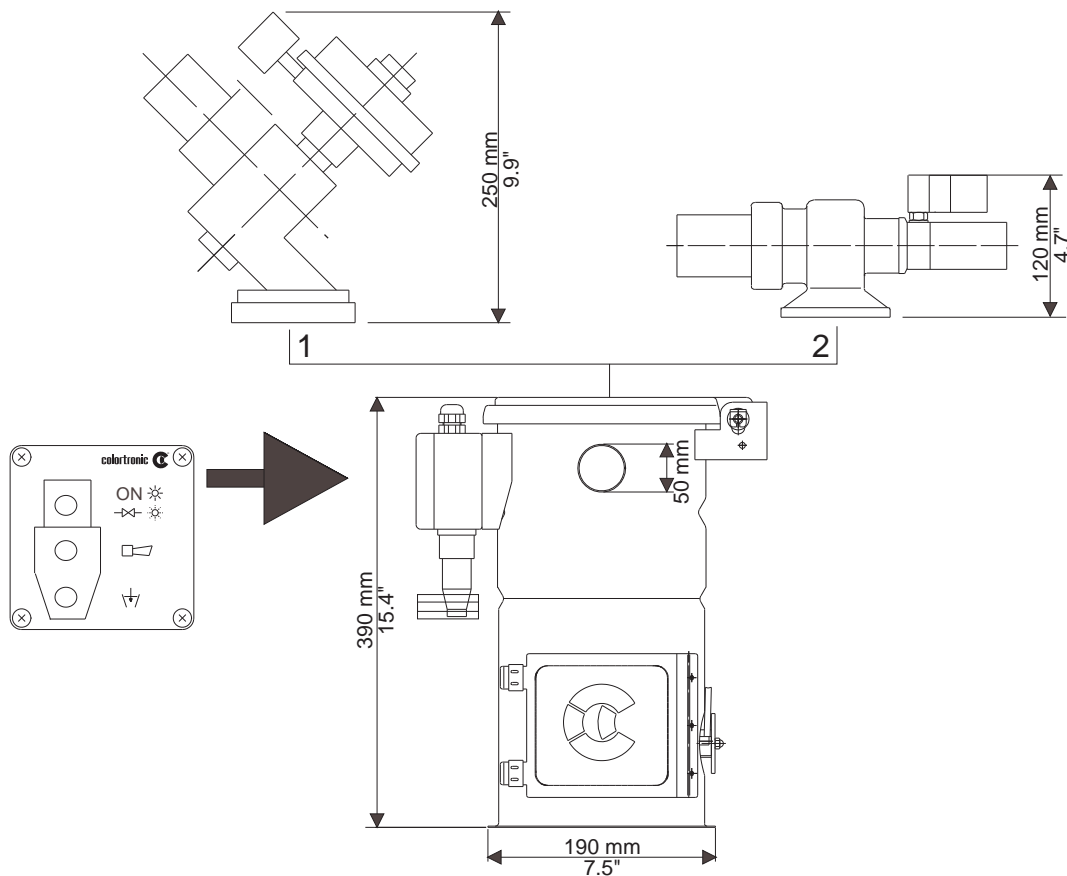

[www.colortronic.com](http://www.colortronic.com)

Colortronic GmbH  
Germany

☎ +49 61 75 7 92-0  
☎ +49 61 75 7 92-1 79  
✉ [info@colortronic.de](mailto:info@colortronic.de)

Colortronic Inc.  
USA

☎ +1 856 312 96 00  
☎ +1 856 312 96 96  
✉ [ctusa@colortronic.com](mailto:ctusa@colortronic.com)

Colortronic Systems Pte. Ltd  
Singapore

☎ +65 77 77 665  
☎ +65 77 88 671  
✉ [ctasia@colortronic.com](mailto:ctasia@colortronic.com)

Colortronic U.K. Ltd.  
Great Britain

☎ +44 12 46 260 222  
☎ +44 12 46 455 420  
✉ [sales@colortronic.co.uk](mailto:sales@colortronic.co.uk)

Colortronic s.a.r.l.  
France

☎ +33 03 88 59 18 10  
☎ +33 03 88 59 18 11  
✉ [ctfrance@colortronic.com](mailto:ctfrance@colortronic.com)

Colortronic AG  
Switzerland

☎ +41 62 889 25 25  
☎ +41 62 889 25 26  
✉ [info@colortronic.ch](mailto:info@colortronic.ch)